

Q/JBG NO.2 CAST IRON OR CAST STEEL PNEUMATIC PINCH VALVE

DESIGN DESCRIPTION:

- Design: Factory STD;
- Manufacture: Factory STD;
- Face To Face: Factory STD;
- Flange: DIN2533;
- Test: Pressure: DIN 3230;
- Three-piece body bolted Body in design.
- Lining NBR
- Fully Guider design.
- Actuator : Pneumatic Actuator.
- Material and Working Temp.:
NBR: -12 °C-82 °C(10.5°F-179°F)




WORKING PRESSURE:

SIZE(DN)	DN25~200	DN250~300
WORKING PRESSURE	MAX 4 BARS	MAX 3 BARS
CONTROL PRESSURE	MAX 6 BARS	MAX 4.5 BARS
DIFFERENT WORKING	MAX 2 BARS	MAX 1.5 BARS

PARTS AND MATERIAL:

PARTS NAME	MATERIALS
NUT	BRASS
PITCH	NBR OR EPDM
BODY	CAST IRON OR CAST STEEL OR ALUMIN ALLOY
FLANGE	STAILESS STEEL OR CARBON STEEL

OTHER MATERIALS ARE AVAILABLE UPON REQUEST.

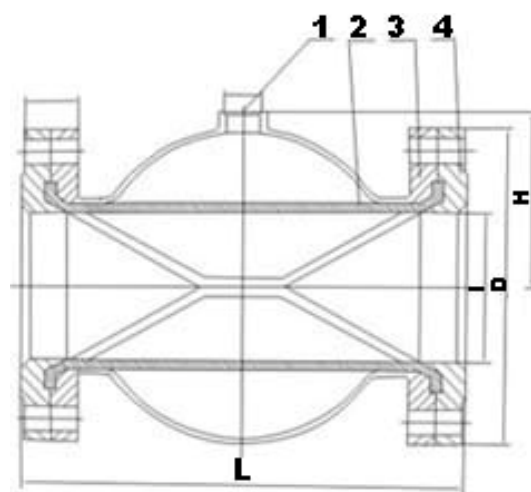

DIMENSIONS LIST(UNIT:MM):

DN	Size	L	H	I	D	Flange Standards	
20	3/4"	95		20	90	PN10	DN20
25	1"	100		25	98	PN10	DN25
32	1-1/4"	140		30	140	PN10	DN32
40	1-1/2"	150	40	38	150/152	PN10	DN40
50	2"	180/195	60	50	165	PN10	DN50
65	2-1/2"	180/230	60	65	200/185	PN10	DN65
80	3"	220/285	75	80	200	PN10	DN80
100	4"	276/365	95	96	220	PN10	DN100
125	5"	345/440	120	120	250	PN10	DN125
150	6"	414/500	145	145	285	PN10	DN150
200	8"	550/540	182	195	340	PN10	DN200
250	10"	680/630	229	245	405	PN10/20	DN250
300	12"	820/730	278	295	480/460	PN10/20	DN300
350	14"	890		345	520	PN10	DN350
400	16"	1090		395	580	PN10	DN400

We hereby reserve the rights of any alternative dimension that would help to improve our valve's quality and working efficiency.